




**EURO-ARM**

Depuis 1973

## Scalarworks FUSE/03 34mm one-piece cantilever mount

<https://europarm.fr/en/produit-21662-Scalarworks-FUSE-03-34mm-one-piece-cantilever-mount>

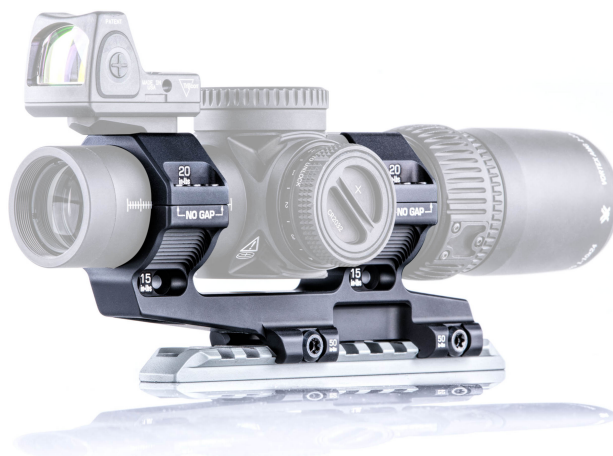

Plus de visuels disponibles sur le site

 SCALARWORKS

**NEW**

SKU	Designation	French Law	Diam. (mm)	Height (cm)	Weight (g)	Mounting	MSRP
SW310157	height 1.57"	Vente libre	34	4	151	21mm rail	480.00 € incl. tax
SW310170	height 1.70"	Vente libre	34	4.3	157	21mm rail	480.00 € incl. tax

### Lightweight and rigid 34mm mount for LPVO optics. Supplied with a level drive tool for leveling the optic with the mount.

The **Scalarworks FUSE/03** is a 34mm one-piece mount designed to offer rigidity, lightness and ease of installation on **Picatinny** rail, ideal for LPVO and long-range optics.

- **Ring diameter:** 34 mm
- **Rail compatibility:** MIL-STD-1913 Picatinny
- **Tilt:** 0 MOA
- **Expansion compatibility:** KICK/06 (RMR), KICK/07 (ACRO)
- **Materials:** 7075-T6 Aluminum / 4140H Steel
- **Finish:** Type III Anodizing / Flash Nitride
- **Weight:** 151 to 157 g depending on the version
- **Origin:** United States

### Box contents

- **Media:** Scalarworks® FUSE/03™
- **Screws:**
  - (12) #8-40 screw with nylon patch
- **Tools :**
  - Scalarworks® T15 Torx Bit
  - Scalarworks® T25 Torx Bit
  - Scalarworks® LevelDrive® Tool

**A mount designed for modern 34mm lenses**

The **Scalarworks FUSE/03** is designed for users of **34mm** optics, whether **LPVO** or high-magnification refractors. From the moment of installation, the simplicity of the bolt-on system is immediately apparent, combined with a rigidity that inspires immediate confidence.

### **LEVEL DRIVE adjustment tool**

Each mount comes with its own level drive tool. This tool is installed in the one-piece mount to ensure perfect alignment between the scope and the mount. A bubble level is not required.

### **Two heights for customized ergonomics**

Available in **1.57" (39 mm)** and **1.70" (43 mm)**, this mount allows you to precisely adjust the sight line to suit your setup and physique. In practice, this translates to improved posture and a more natural target acquisition.

### **Rigidity and high-end design**

Machined from **7075-T6 aluminum** with **4140H steel** components, the **FUSE/03** offers excellent mechanical strength. **Type III** anodizing and **Flash Nitride** treatment ensure optimal durability, even under intensive conditions.

### **Scalable platform with 12 o'clock red dot**

This setup allows you to add a **secondary red dot sight** at the **12 o'clock** position using **KICK** extensions. It is compatible with the **KICK/06** (RMR footprint) and the **KICK/07** (ACRO), offering an ideal solution for improving responsiveness without compromising the main configuration.

### **Universal compatibility**

The **FUSE/03** is designed for **MIL-STD-1913 Picatinny** rails and is compatible with a wide range of platforms, including **B&T** models. It provides a reliable foundation for any performance-oriented setup.

## **FAQ**

### **Which height should I choose between 1.57" and 1.70"?**

The 1.57" height is more compact, while the 1.70" offers better comfort depending on your posture and equipment.

### **Can a secondary red dot be added?**

Yes, via the **KICK/06** (RMR) and **KICK/07** (ACRO) extensions in the 12 o'clock position.

### **Is this assembly compatible with all rails?**

It is compatible with MIL-STD-1913 Picatinny standard rails.

*Les prix de vente conseillés sont mentionnés à titre indicatif. Les armuriers sont libres de vendre au prix qu'ils souhaitent. Textes et photos non contractuels, sujet à modification.*